



Description

An extremely long life, 6 figure, electromechanical counter available in panel mounting versions with manual push-button reset. High count speeds, bold numbers, and contemporary design make this ideal in office, graphic arts, medical and computer applications.

Features

- High count speed
- Bold numbers
- Contemporary design

Options

- Voltages
- Lead lengths
- Terminations

Specifications

Figures: 6 figures, white on black, 0.15" [4mm] high
Reset: Push-button
Speed: 1,000 counts/minute AC, (min. 30ms - on, 30ms - off)
 1,500 counts/minute DC, (min. 20ms - on, 20ms - off)
Voltages: 115VAC, 24VDC
 (+/- 10%, but not to exceed 10 volts)
Power: 2.8 watts (nominal)

Mounting: Panel
Terminations: Solder terminals
Operating Life: Beyond 200 million counts
Temp. Range: -15°F to +140°F [-26°C to +60°C]
Approvals: UL Recognized, CSA Certified, CE Compliant
Weight: 8 oz. [227g]

Models Description

P2-3106 115VAC, P panel mount, manual reset
R2-3106 115VAC, R panel mount, manual reset
 P8-3206 24VDC, P panel mount, manual reset

Models Description



P9-3206 12VDC, P panel mount, manual reset
 R8-3206 24VDC, R panel mount, manual reset

* Items in bold are normally in factory stock.

Dimensions

P - Mount

R - Mount

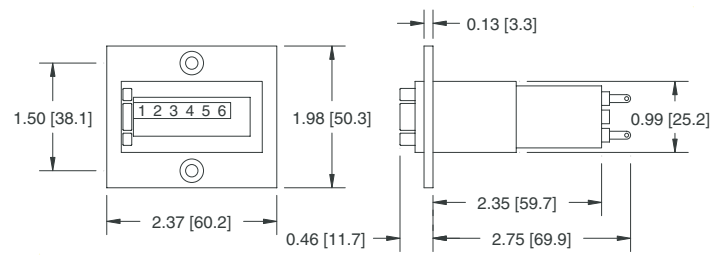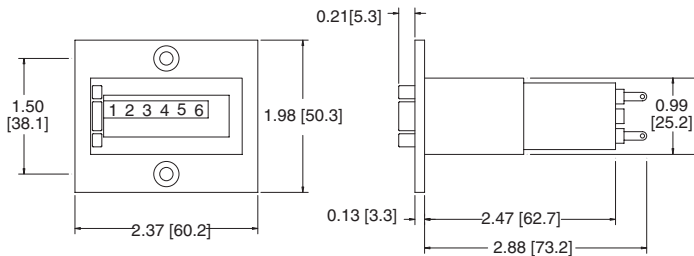

Mounting holes: For #8 flat head screw
 Panel cutout: 2.02" x 1.05" [51.3 x 26.7mm]

Applications

Graphic arts

Office equipment

Computer applications

Medical equipment

Control panels

